


The high-end paddock grid.

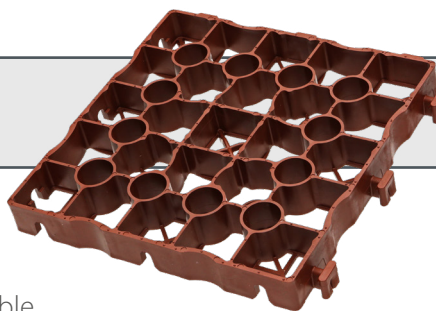

recommended for:

- paddocks and walkers
- access and storage areas
- paths, feeders, open and active stable

Specifications	
Dimensions:	33 x 33 x 4 cm 12.99 x 12.99 x 1.57 "
Wall thickness:	up to 4.0 mm 0.16 "
Dimensional stability:	-50° / 90° C -58° / 194° F
Solubility:	resistant to acids, alkalis, alcohol, oil and petrol (de-icing salt, ammonia, acid rain, etc.)
Moisture absorption:	0.01 %
Weight per m² 10.76 ft²	6.93 kg 15.28 lbs
Weight per piece:	0.77 kg 1.70 lbs
Interlock:	36 notched connectors per m ²
Max. open surface:	approx. 90 %
Material:	LD-PE, recycled
Loadability:	up to 800 t/m ² (depending on fill type)
Compressive strength:	up to 20 t point axle load (DIN 1072)
UV- resistant and weatherproof:	according to DIN EN ISO 4892-2 and DIN EN 60068-2-5
Environmental compatibility:	environmentally neutral according to OECD 202:2004
Highly durable:	according to DIN EN 124:2011 (D400)
Tensile strength:	> 5 kN/m
Package	
Standard installation unit:	1 layer (= 12 pieces, equates 1.33 m ²)
Layer per pallet:	55
Area per pallet:	73.33 m ² 789.32 ft ²
Qty. per pallet:	660
Dimensions:	105 x 135 x 235 cm 41.34 x 53.15 x 92.52 "
Weight per pallet:	518 kg 1 141.99 lbs (incl. plastic pallet and packaging)

Your contact:



NOTE:

a. Please note the installation instructions on our website! Subject to change without prior notice. E. & O.E.
 b. The listed details are nominal dimensions and subject to a certain tolerance due to material changes